

flexiflumeTM

The original and the best woven fluming




Bartlett
Covering Australia



▲ Closed Outlet



▲ Open Outlet



▲ Flexiflume transfers water from a bore



▲ Row crop flood irrigation




▲ Row crop flood irrigation

flexiflume™

Flexiflume is the original woven lay flat fluming providing a fully portable water transfer system. Flexiflume is adaptable, durable and widely used for both row crop irrigation and water transfer.

- ▶ Manufactured from woven polyethylene fabric, Flexiflume has the capacity to handle large amounts of water over a variety of terrains.
- ▶ Ideal for row crop flood irrigation applications, Flexiflume carries a 5 year UV warranty.
- ▶ Flexiflume is built to withstand high volume, low pressure water transfer over varying distances.
- ▶ Bartlett also provide an array of fluming accessories including outlets, joiners, clamps, cut-off clamps and hole punchers.
- ▶ Variable flow outlets can be regulated to control flood rates to suit any crop and soil type.

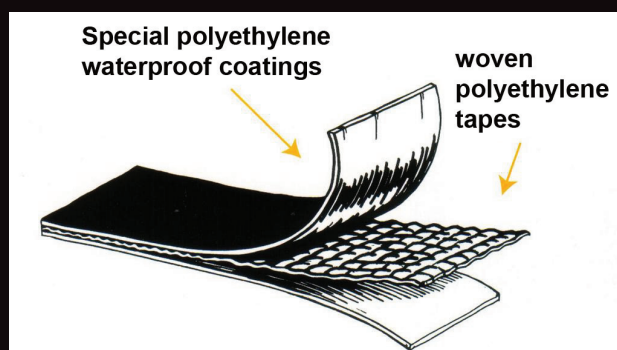

FLEXIFLUME INSIDE DIAMETER		RECOMMENDED MAXIMUM WORKING PRESSURE	
True diameter in mm	Nominal diameter in inches	P.S.I	Metres head
86	3	16	11
134	5	12	9
183	7	8	6
231	9	7	5
280	11	5	3.5
328	13	3	2.3
425	16	2	1.5

Note: when using outlets the maximum head pressure regardless of Flexiflume diameter being used is 1.4m

CE Bartlett Pty Ltd.

172 Ring Road, Ballarat VIC 3355

Free call 1800 115 440

Ph: +61 3 5339 3103 Fax: +61 3 5338 1241

Email: info@bartlett.net.au

www.bartlett.net.au